



UNIVERSITY OF
SOUTH CAROLINA

CSCE 574 ROBOTICS

**Research Robotic Software Design, Development,
and Testing**



Alberto Quattrini Li
albertoq@cse.sc.edu



Ioannis Rekleitis

Main Robot Architectures

- Deliberative
 - Top-down approach

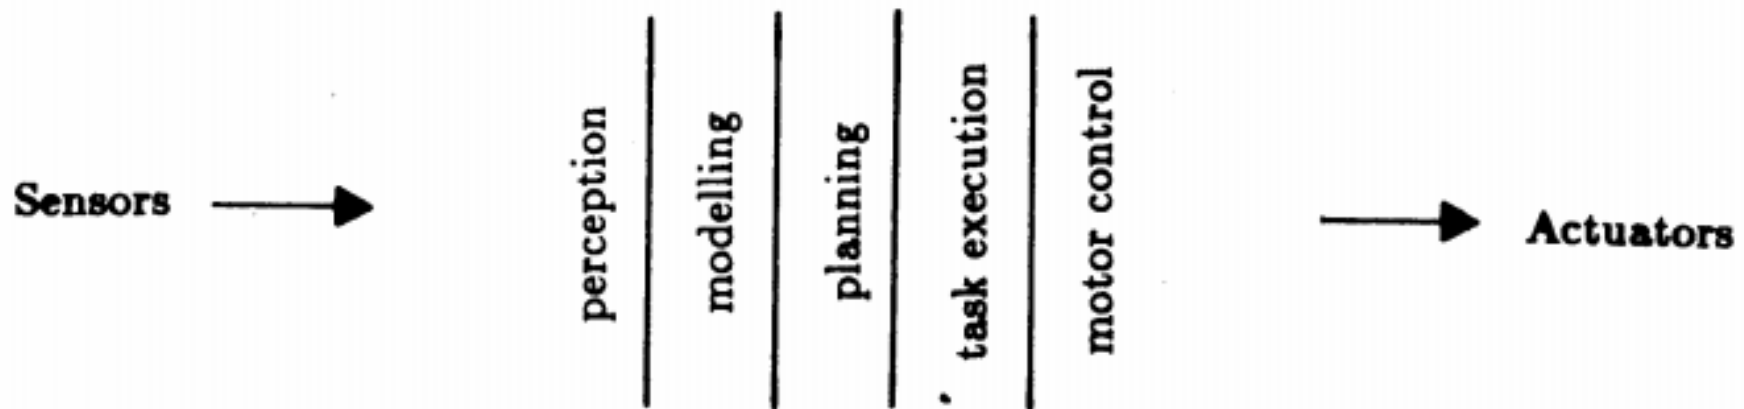
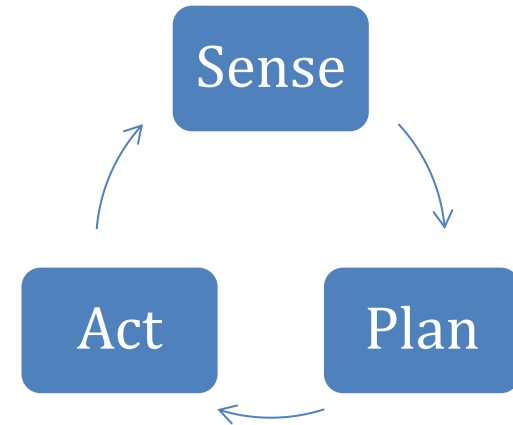


Source: [Brooks, 1985, MIT]




Main Robot Architectures

- Reactive/Behavior-based/Subsumption
 - Responsive to dynamic changes

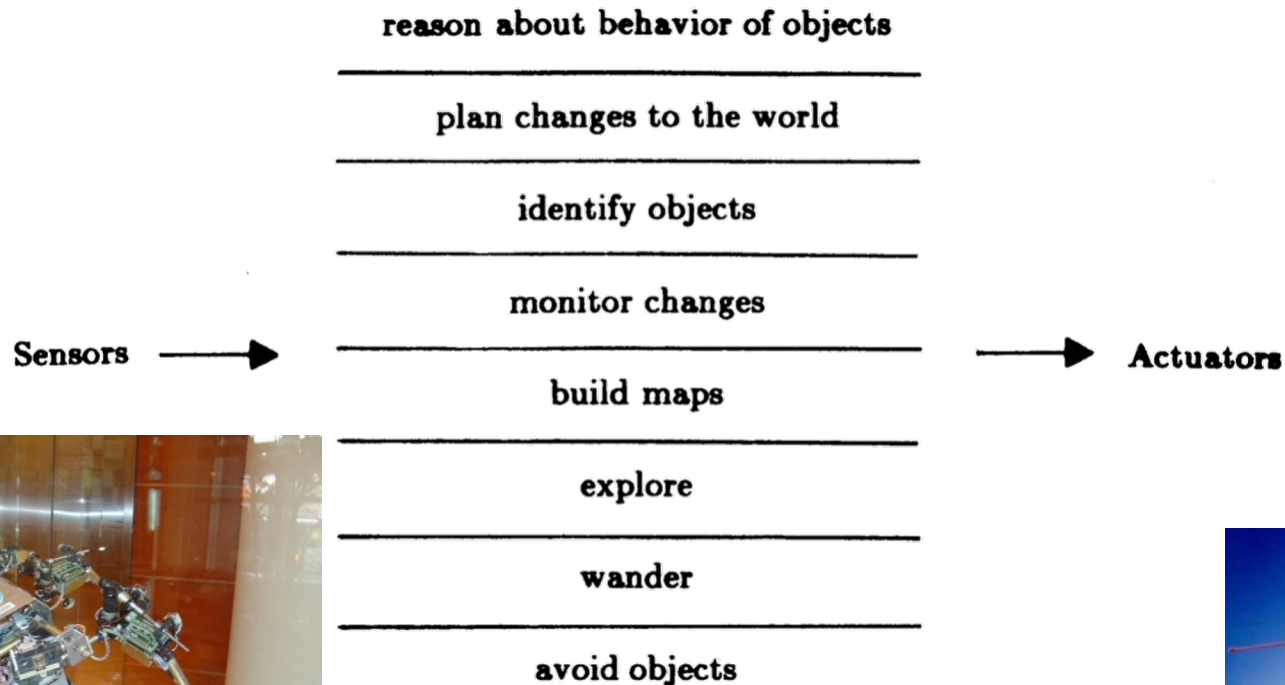

Source: [Brooks, 1985, MIT]

Spectrum of control

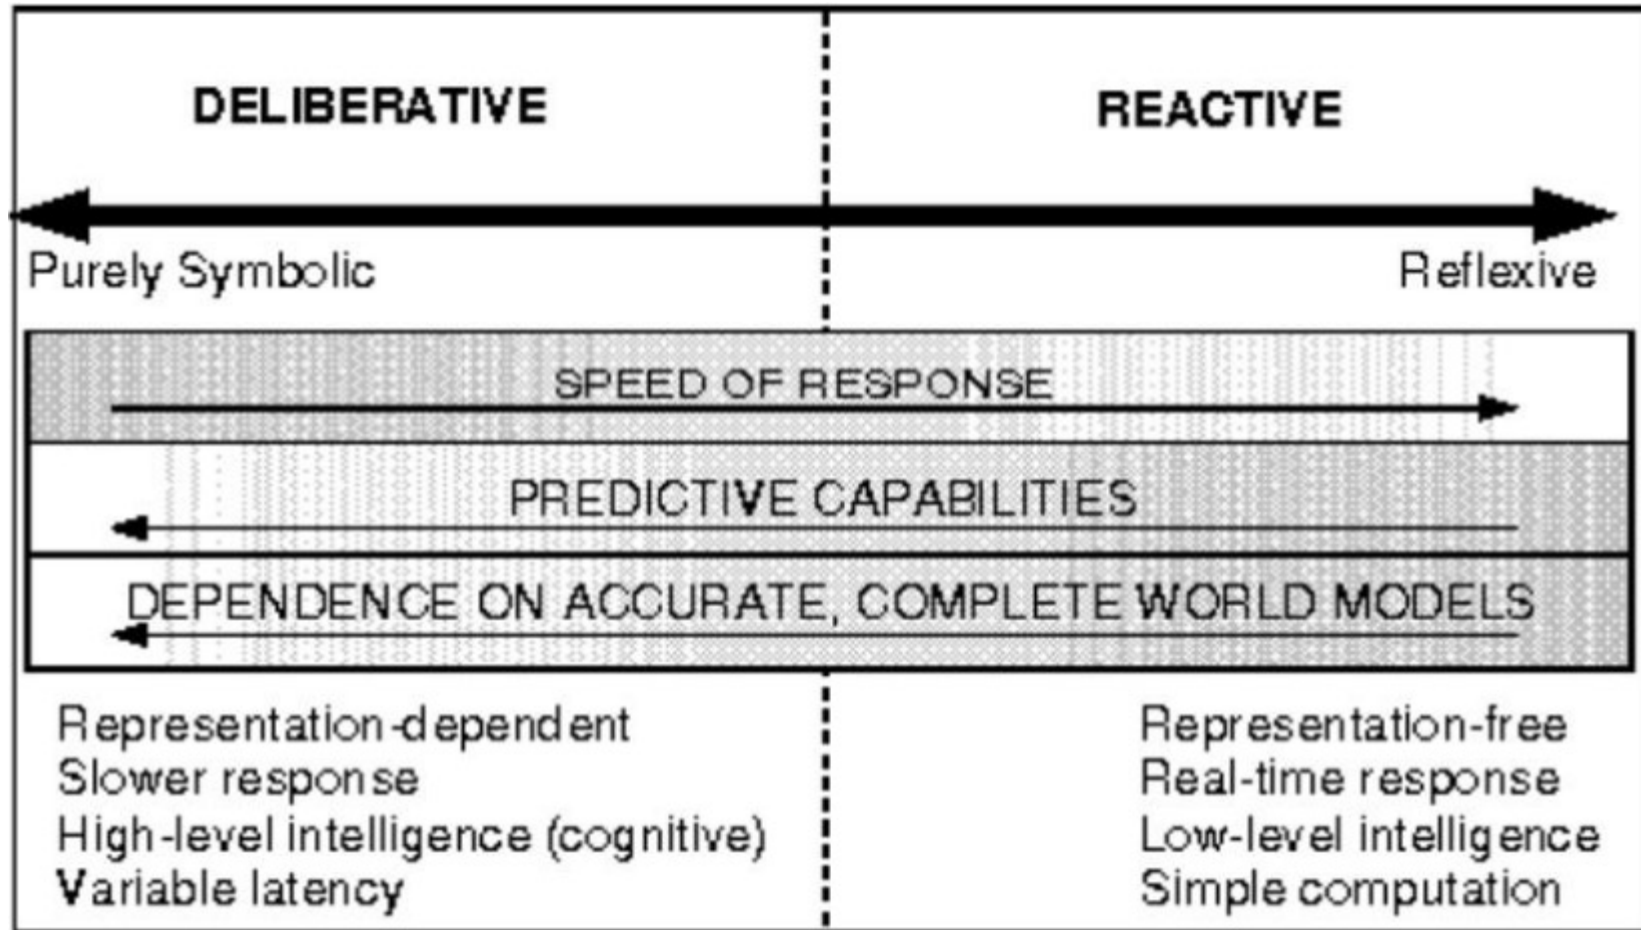

Source: [Arkin, 1998, MIT Press]



Three-Layer Architectures

- The Controller (low level, tight coupling)
- The Sequencer (selecting low level behaviours)
- The Deliberator (time-consuming computations)

See: <http://www.flownet.com/gat/papers/tla.pdf>



CLARAty

- A two layer architecture
- Developed at NASA/JPL
- Supporting different h/w



See: <http://claraty.jpl.nasa.gov/man/overview/index.php>




Approach

- Develop
 - Common data structures
 - Physical & Functional Abstractions
 - E.g. motor, camera, locomotor. Stereo processor, visual tracker
 - Unified models for the mechanism
- Putting it together
 - Start with top level goals
 - Elaborate to fine sub-goals
 - Choose the appropriate level to stop elaboration
 - Interface with abstractions
 - Abstractions translate goals to action
 - Specialize abstractions to talk to hardware
 - Hardware controls the systems and provide feedback

From: http://claraty.jpl.nasa.gov/main/overview/presentations/FY05/FY05_claraty_jtars.pdf



Two Layer Architecture

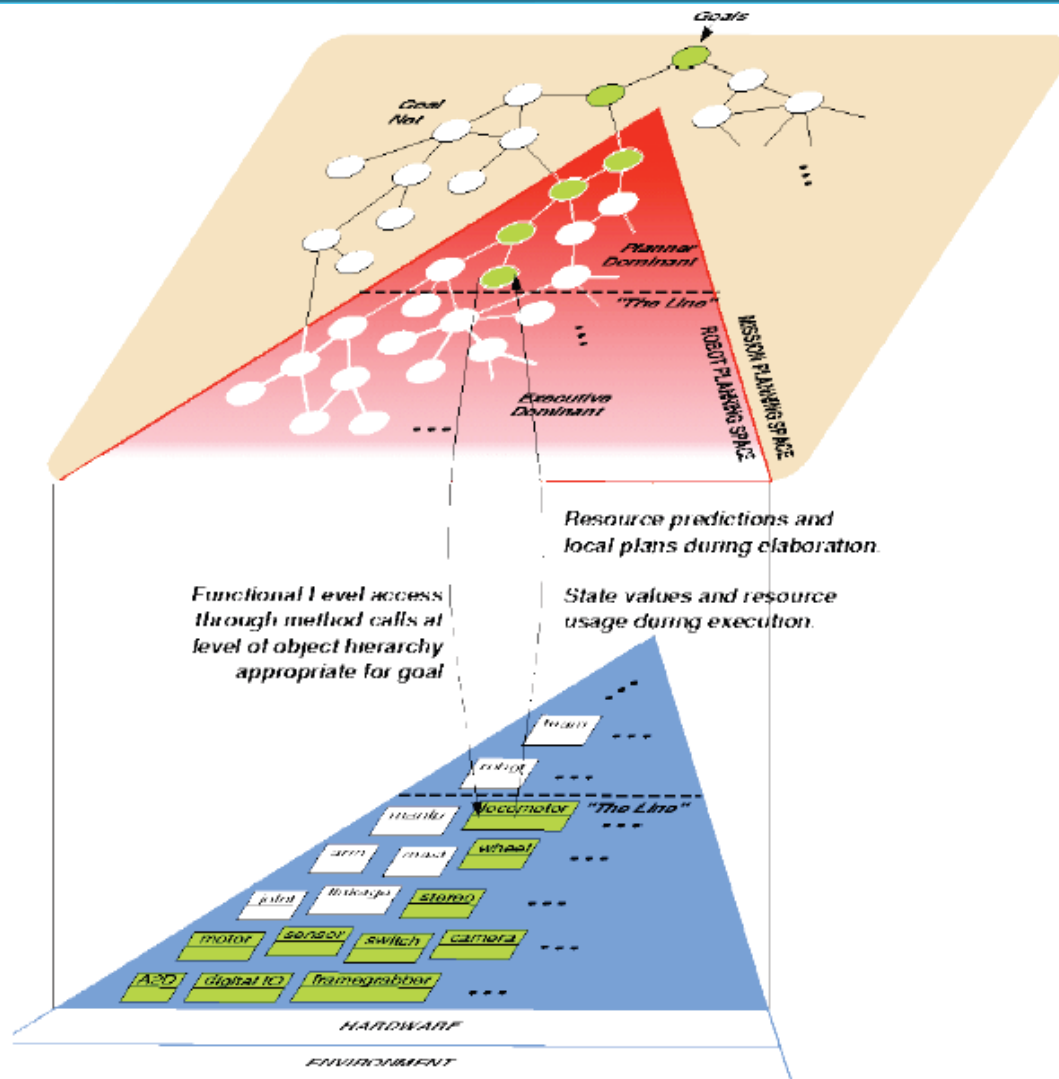

THE DECISION LAYER:

Declarative model-based
Global planning

INTERFACE:

Access to various levels
Commanding and updates

THE FUNCTIONAL LAYER:

Object-oriented abstractions
Autonomous behavior
Basic system functionality

Adaptation to a system



Research Process

- Identify problem of interest
 - Why is it important to solve it
 - What has been done in the literature
- Study, design, and develop the algorithm for robotic applications
 - Approximability, approximation
 - Space and computational complexity
 - Heuristics
- Deploy algorithm
 - Simulation
 - Fielded robots
- Evaluate performance of algorithm on experiments



Software for a robot

- Robots are complex systems that involve a large number of individual capabilities
- Robot architecture is the set of principles, building blocks, and tools for designing robots
 - Architectural structure: system into subsystems with interaction
 - Architectural style: how communication happens
- Currently in a robot there might be multiple robot architectures
- However, a well-conceived architecture can have significant advantages for specification, execution, and validation





Robot Architectures Decomposition

- *Modular* decomposition reduces complexity by decomposing systems into simpler independent pieces
- *Hierarchical* decomposition reduces system complexity through abstraction



Main Robot Architectures

- Layered
 - Integration between reactivity and deliberative

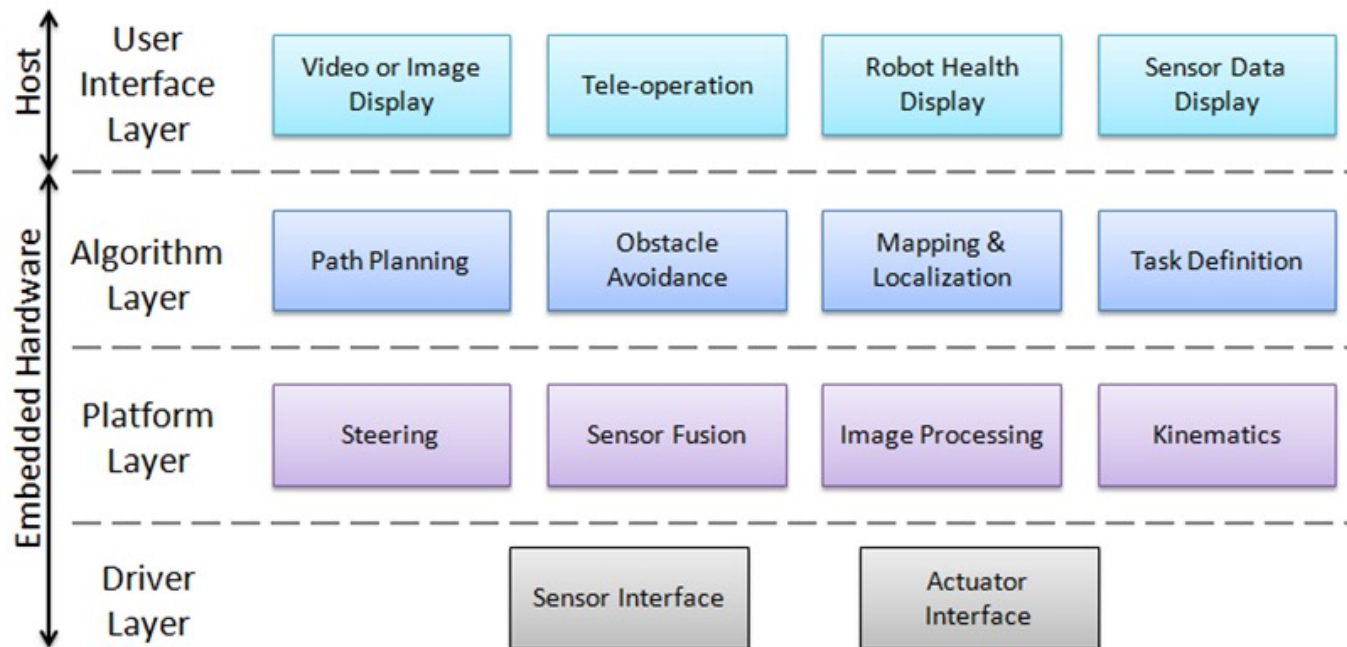


Source: ni.com




Middleware

- Components need to share information

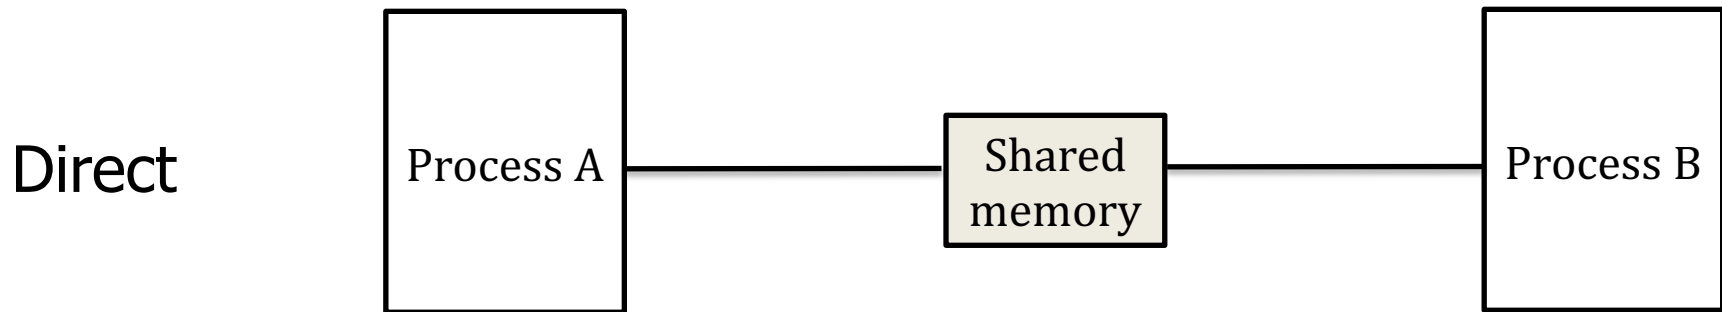

- To make the system modular, a *middleware* can be designed, i.e., the way that components in a robot architecture communicate

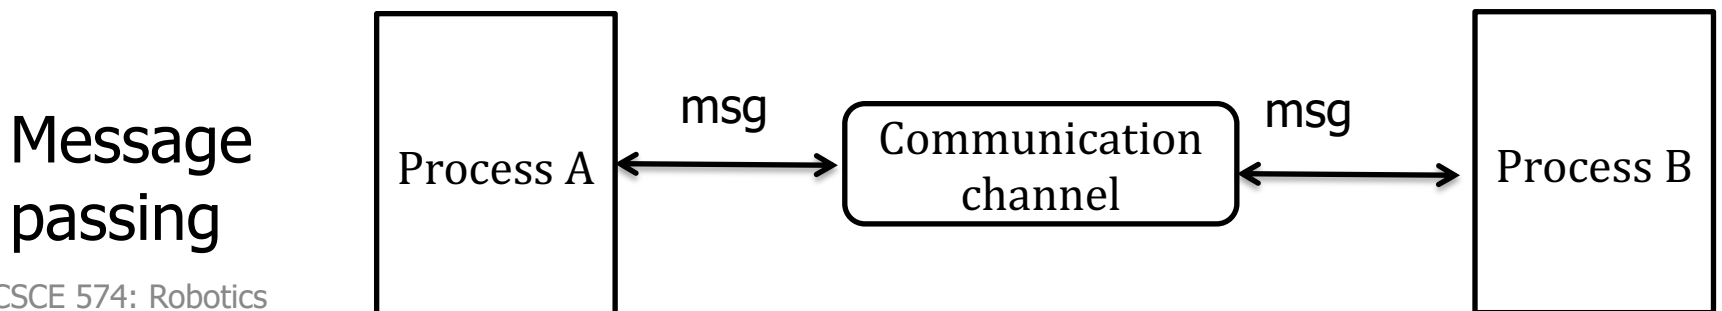

Basic approaches for message passing

- Client/server: send information as generated by producer (push) or as requested by consumer (pull)
- Publish/Subscribe: consumers request a subscription to a producer and producer sends generated subscribed data to consumers
 - Peer-to-peer: direct connection with producer that sends timestamped data
 - Blackboard-based: middle entity that stores the last instance of data



How to design a robot architecture

- Drawing from software engineering, first all of the requirements and desiderata should be explicitly defined
 - What are the tasks?
 - What actions are necessary to accomplish them?
 - What data is necessary to do the tasks?
 - What capabilities the robot will have?
 - Who are the robot's users?
 - Will the robot architecture used for other tasks/robots?



Robot Architecture Features for Research

- Hardware abstraction
- OS independent
- Open access
- Robustness
- ...



Robot Architecture Features for Research

- Modularity
 - Support for multiple components
 - Communication between components
 - Easy way to write own components
 - Possibility to replace individual components
- Support for decentralized components
- ...



Robot Architecture Features for Research

- Support for setting at runtime parameters, handled centrally
 - Fixed, through files
 - Dynamically
- Support to log data (timestamped)
- Way to visualize the system and the data
- ...



Robot-Dependent Frameworks

- Ndirect, seriald (Nomadics)
- RHeXLib (University of Michigan - Ann Arbor, McGill)
- ...



Robot Independent Frameworks

- ROS (Willow Garage)
- MOOS (Paul Newman, Oxford)
- IPC (Reid Simmons — CMU)
- LCM (Albert Huang, Edwin Olson, David Moore — MIT)
- Player (Bryan Gerkey, Richard Vaughan, Andrew Howard — USC)
- OROCOS (Herman Bruyninckx, Peter Soetens, KU Leuven)
- OpenRTM (Japan's National Institute of Advanced Industrial Science and Technology)
- YARP (Italian Institute of Technology)
- Microsoft Robotics Studio
- ...



Best practices

- All modules should use
 - The same units (SI units)
 - The same coordinate frames (or provide relations between a common reference frame)



Best practices

- When writing software given the modularity it is advisable to follow some style guide
- Also properly documenting the code is important
- Unit testing should be performed to ensure no problem with other components



ROS example

- ROS suggests to follow some style guide
 - <http://wiki.ros.org/StyleGuide>
- For documenting, the code, Doxygen is used
- For unit testing, basically unittest and gtest are used
- Debug for C++ node can be performed through gdb by using `launch-prefix="xterm -e gdb --args"` when running the node



Best practices

- Sound experimental methodologies should be in place, following scientific principles
 - Comparison
 - Reproducibility
 - Repeatability
 - Justification/explanation
- For properly assessing the goodness of an algorithm, the following aspects should be considered:
 - Realism of environments and robot setup
 - Evaluation criteria
 - Sensitivity analysis
 - Statistical analysis (e.g., ANOVA)
 - ...



Best practices

- Logging data is important so that
 - No continuous human supervision
 - Collecting training data
 - Some post-processing can be applied
 - Performance evaluation
 - Debugging and reproducing failures
 - ...
- The type of data to log depends on the specific task, algorithm being evaluated, ...
- Visualization is important especially in robotics given the grounding to the real physical world



Simulations

- Simulators partially model the world and as such will never replace real world experiments
- "Simulations are doomed to succeed"
 - Simulations must be verified
- However, if critically used, simulations are useful because
 - Easy to compare results with ground truth
 - Control the amount of noise
 - Control the time
 - Possibility to execute thousands of runs
 - No hardware problems
 - Ease the debugging process
 - ...



Robotic Simulator

- Gazebo (OSRF)
- Stage (Vaughan – Simon Fraser University)
- UWSim (Prats, Perez, Fernandez, Sanz – Universitat Universitat Universitat Jaume I)
- USARSim (Carpin – UC Merced, Lewis , Wang – U Pittsburgh, Balakirsky, Scrapper – NIST)
- v-rep (Coppelia Robotics)
- RHeX SimSect
- Webots (Cyberbotics)
- MORSE (LAAS-CNRS)
- Nclient, server (Nomadics)
- RD11 (McGill)
- ...



Best practices

- Before performing any field experiments, carry out any calibration process needed for the system to work properly
 - e.g., collecting footage for calibrating cameras



Best practices

- For field experiments, it is important to plan missions
 - Where to perform experiments
 - What are the goals for the experiment
 - Estimate time and energy
 - Mission logistics
 - Is there any regulation that must be complied?
 - Plan the data to be logged and collected and the parameters to be set
- Note that before actually going for a field experiment
 - Ensure everything is tested and software is updated and running
 - Batteries are fully charged



Discussion

- Currently no single architecture has proven to be suited for all applications
- Robot architectures should provide
 - Transparent flexible message-based communication network
 - Easy to use and transparent logging and playback capabilities
 - Centralized parameter handling
 - Abstraction of the actual hardware to focus on higher level components

