

Hybrid Dense Sensor Network for Damage Detection on Wind Turbine Blades

Austin Downey, Simon Laflamme, Filippo Ubertini, Heather Sauder
and Partha Sarkar

NSF-IGERT fellow

Wind Energy Science Engineering and Policy

austindowney@gmail.com - adowney2.public.iastate.com


September 26th 2016



IOWA STATE UNIVERSITY

Hybrid Dense Sensor Network for Damage Detection on Wind Turbine Blades

Soft Elastomeric Capacitor (SEC)
Fiber Bragg Grating (FBG)
Resistive Strain Gauge (RSG)

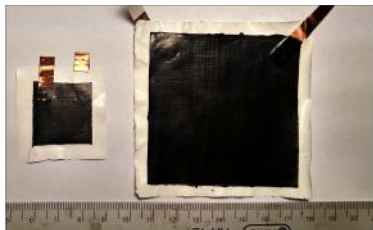

Overview


Contents

- 1 Introduction (Iowa!)
- 2 Motivation
- 3 Hybrid Dense Sensor Networks (HDSN)
- 4 Network Reconstruction Feature (NeRF)
- 5 Simulation
- 6 Conclusion



Failure of a 49 meter wind turbine blade wind-watch

Center for wind

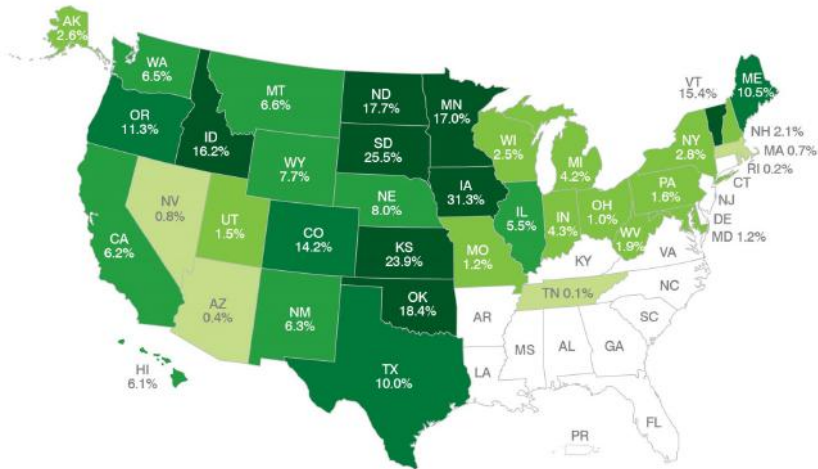

US wind energy share of electricity generation during 2015 iowa.gov

Largest wind project (building)

FUTURE TENSE THE CITIZEN'S GUIDE TO THE FUTURE. | SEPT. 1 2016 2:38 PM
FROM SLATE, NEW AMERICA, AND ASU

The Most Impressive State for Clean Energy

It's Iowa. Really!

By Daniel Gross

  
7.0k 190 112



Iowa has been one of the epicenters of America's wind boom.

DarcyHusby/Thinkstock

Wind XI will add 1000 2-megawatt machines. slate.com


Tallest tower



MidAmerican building tallest land-based (US) wind turbine (115 meter hub height) Donnelle Eller

Motivation

- In 2015 the United States was the world's number one producer of wind energy.
- In total, domestic wind energy provided 181.79 terawatt-hours or 5.1% of the nation's end use electricity demand in 2015. NREL

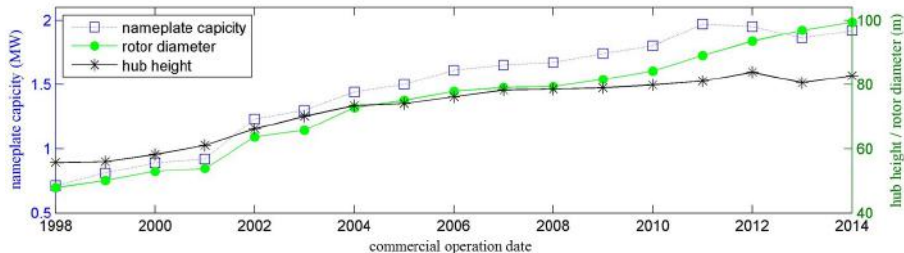

Blades, a mesoscale challenge



Experimental 75 meter blade. Siemens

Bigger Blades



Enercon has introduced low-wind speed versions to its 4MW and 2MW onshore wind turbine platform.


Remote and Extreme Conditions



Blade installation in Kotezebue Alaska, used with permission KEA

Structural Health Monitoring of Wind Turbine Blades

Utilizing large area electronics for global coverage

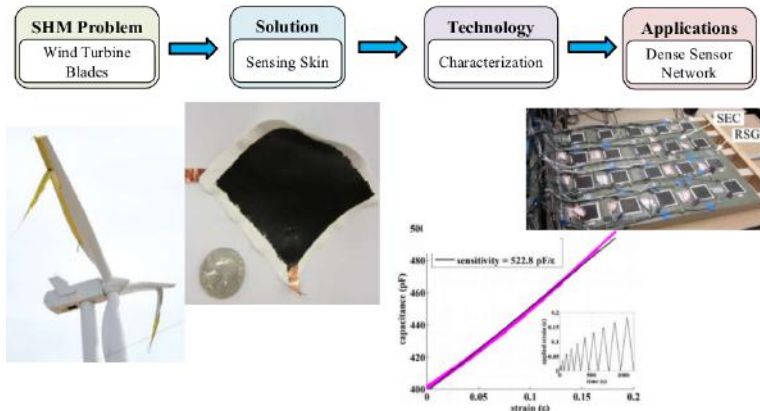

Hybrid Dense Sensor Networks (HDSN)




HDSN: 20-SEC, 46-RGSs. Austin Downey



Commercial fiber Bragg grating sensors Smart Fibres




HDSN: 12-SEC, 8-RGSs. Austin Downey




HDSN: 276-SECs and 140-FBG nodes. Austin Downey

Wind Tunnel Testing

Wind Tunnel Testing

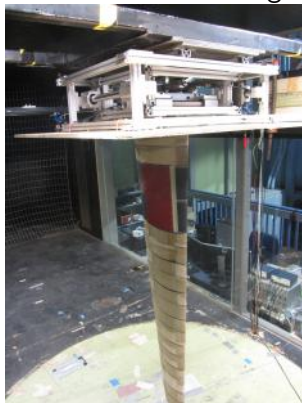


Strain Maps

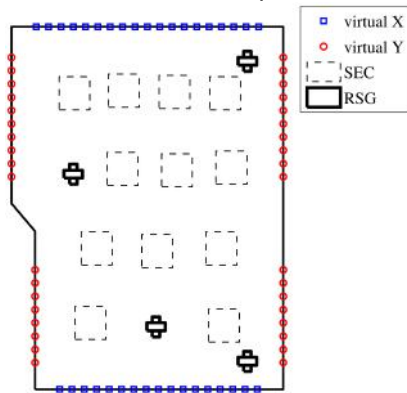


Implementation

- 1 Deployable inside wind turbine blades
- 2 Retrofit or OEM.
- 3 Useful for other large structures



Inside a 45 meter GE blade Austin Downey

Damage Cases




Typical damage cases: 1) through crack; 2-3) edge split; 4) impact. Austin Downey

Damage detection and localization through a Network Reconstruction Feature (NeRF)


Damage detection and localization through a Network Reconstruction Feature (NeRF)

- 1 Data fusion of the additive SEC signal and unidirectional FBG signal.
- 2 Distinguish healthy states from possibly damaged states.
- 3 Capable of damage detection, quantification and localization.
- 4 Can function without historical data set or external models.

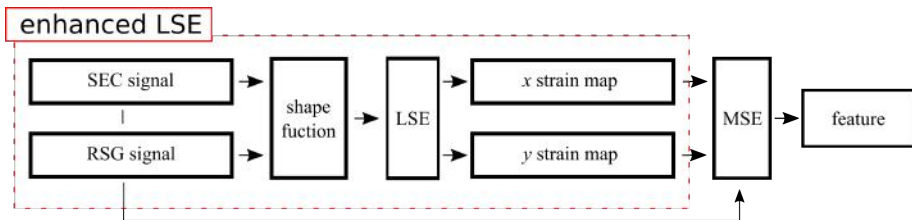

Extract damage features based on the fit of a shape function

Shape Function

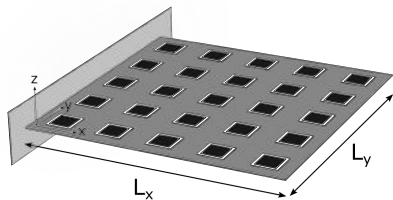


schematic representation of cantilever plate with SEC array

$$\begin{array}{c}
 a \\
 x + y \\
 x^2 + xy + y^2 \\
 x^3 + x^2y + xy^2 + y^3 \\
 x^4 + x^3y + x^2y^2 + xy^3 + y^4
 \end{array}$$

Pascals Triangle for displacement function

Shape Function

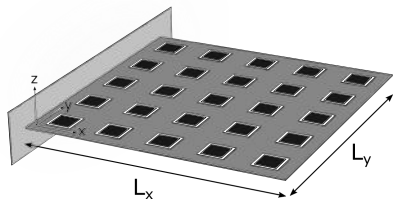

schematic representation of cantilever plate with SEC array

$$\begin{array}{c}
 a \\
 x + y \\
 x^2 + xy + y^2 \\
 x^3 + x^2y + xy^2 + y^3 \\
 x^4 + x^3y + x^2y^2 + xy^3 + y^4
 \end{array}$$

Pascals Triangle for displacement function

Kirchhoff's theory of thin plates

$$\varepsilon_x(x, y) = -\frac{c}{2} \frac{\partial^2 z}{\partial x^2} = -\frac{c}{2} (2a_2 + 2a_5y + 6a_6x + 2a_9y^2 + 6a_{10}xy + 12a_{11}x^2)$$

$$\varepsilon_y(x, y) = -\frac{c}{2} \frac{\partial^2 z}{\partial y^2} = -\frac{c}{2} (2a_3 + 2a_4x + 6a_7y + 6a_8xy + 2a_9x^2 + 12a_{12}y^2)$$

Unidirectional strain maps

$$\hat{\varepsilon}_x(x, y) = \hat{b}_1 + \hat{b}_2x + \hat{b}_3y + \hat{b}_4x^2 + \hat{b}_5xy + \hat{b}_6y^2$$

$$\hat{\varepsilon}_y(x, y) = \hat{b}_7 + \hat{b}_8x + \hat{b}_9y + \hat{b}_{10}x^2 + \hat{b}_{11}xy + \hat{b}_{12}y^2$$


Unidirectional strain maps

$$\hat{\varepsilon}_x(x, y) = \hat{b}_1 + \hat{b}_2x + \hat{b}_3y + \hat{b}_4x^2 + \hat{b}_5xy + \hat{b}_6y^2$$

$$\hat{\varepsilon}_y(x, y) = \hat{b}_7 + \hat{b}_8x + \hat{b}_9y + \hat{b}_{10}x^2 + \hat{b}_{11}xy + \hat{b}_{12}y^2$$


solve for b using least squares estimator (LSE):

$$\hat{\mathbf{B}} = \frac{1}{\lambda}(\mathbf{H}^T\mathbf{H})^{-1}\mathbf{H}^T\mathbf{S}$$

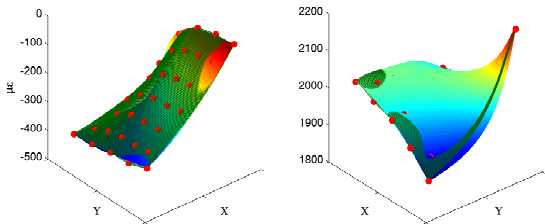


Unidirectional strain maps, ε_x and ε_y .

Building a HDSN

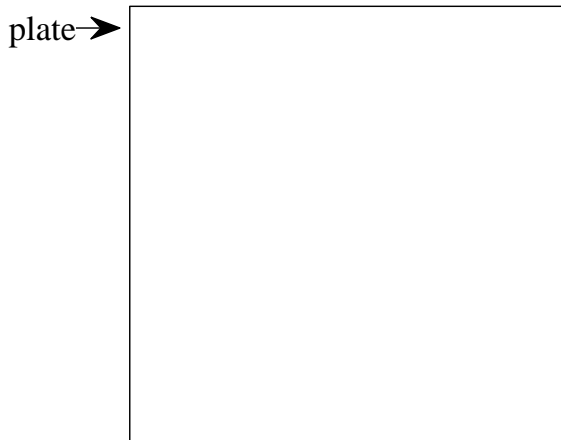


Deploying HDSN of SECs and FBG onto a plate.

Building a HDSN

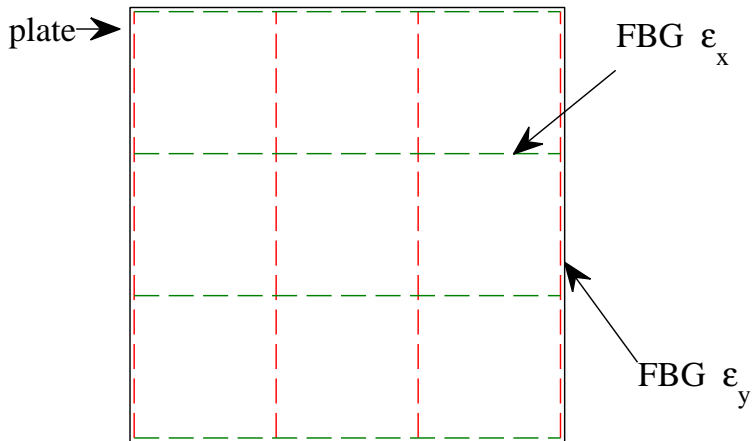


Deploying HDSN of SECs and FBG onto a plate.

Building a HDSN

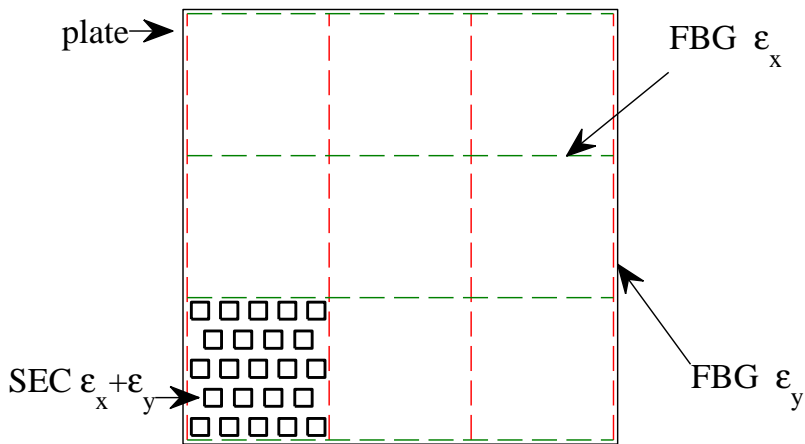


Deploying HDSN of SECs and FBG onto a plate.

Building a HDSN

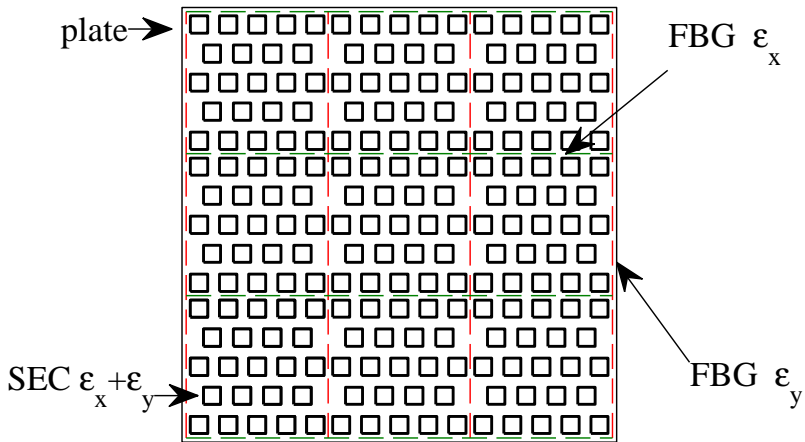


Deploying HDSN of SECs and FBG onto a plate.

Damage Cases

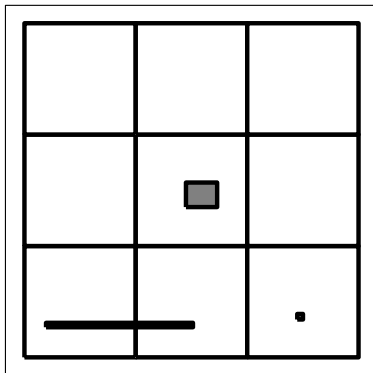


Cantilever plate with damage induced as reduction of stiffness.

Damage Cases

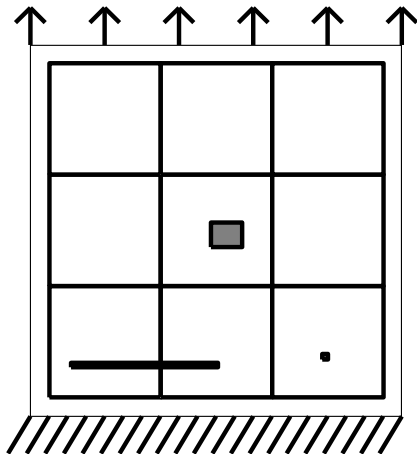


Cantilever plate with damage induced as reduction of stiffness.

Damage Cases

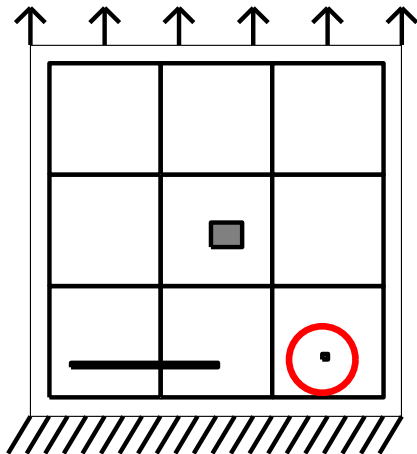


Cantilever plate with damage induced as reduction of stiffness.

Error Detection

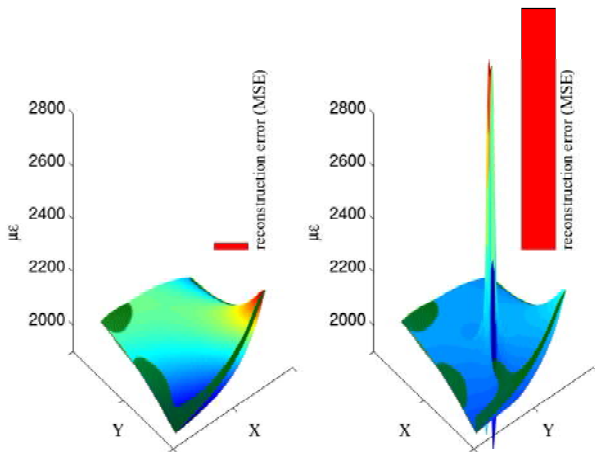



Error in strain map reconstitution measures at sensor locations.

Feature Extraction

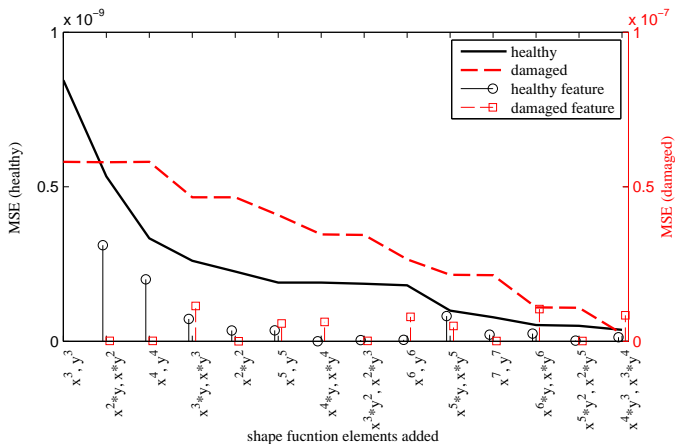



Features extracted from change in fit with increasing shape function complexity

Damage Quantification

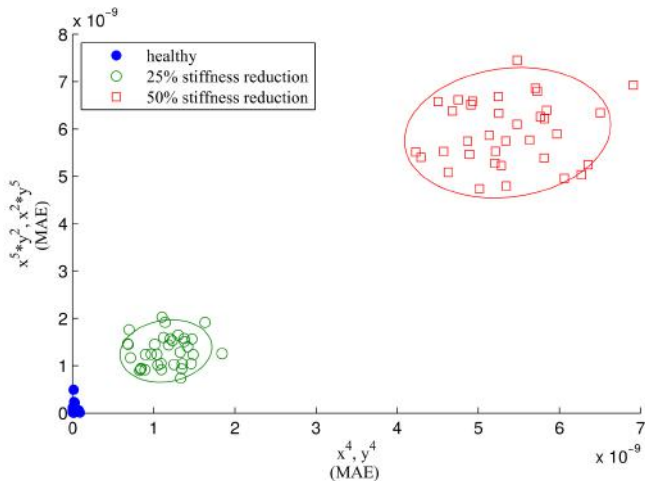



Different damage levels in a feature-feature plot.

Damage Quantification

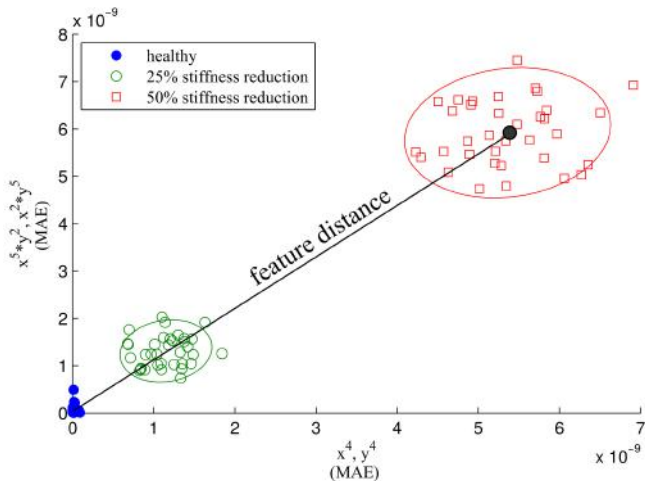



Different damage levels in a feature-feature plot.

Damage Localization

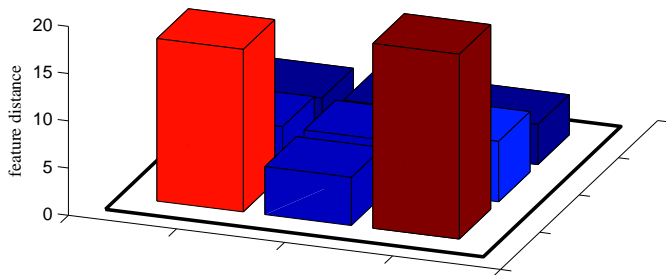



Damage localization on cantilever plate with damage induced as reduction of stiffness.

Damage Localization

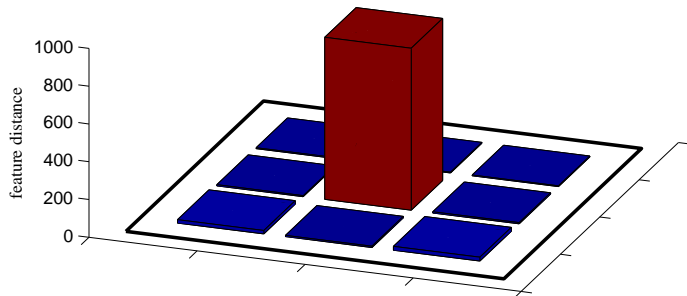



Damage localization on cantilever plate with damage induced as reduction of stiffness.

Damage Localization

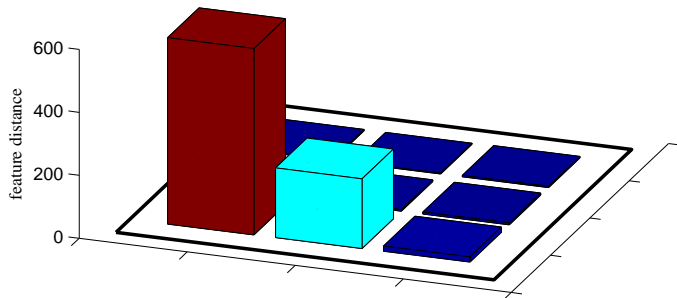


Damage localization on cantilever plate with damage induced as reduction of stiffness.

Damage Localization

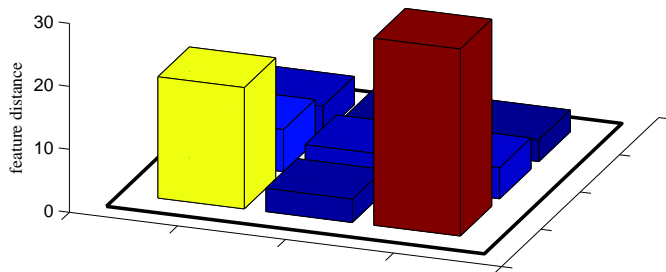


Damage localization on cantilever plate with damage induced as reduction of stiffness.

Wind Turbine Blade Example

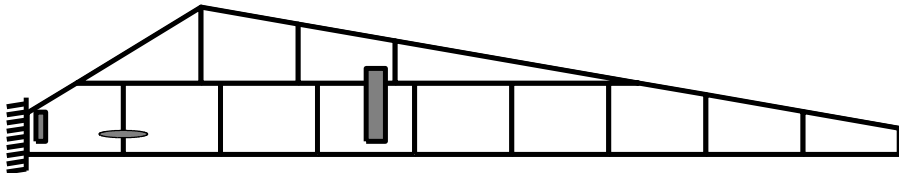


Wind turbine blade shaped cantilever plate with damage induced as reduction of stiffens, pressure loading on face.

Damage Localization

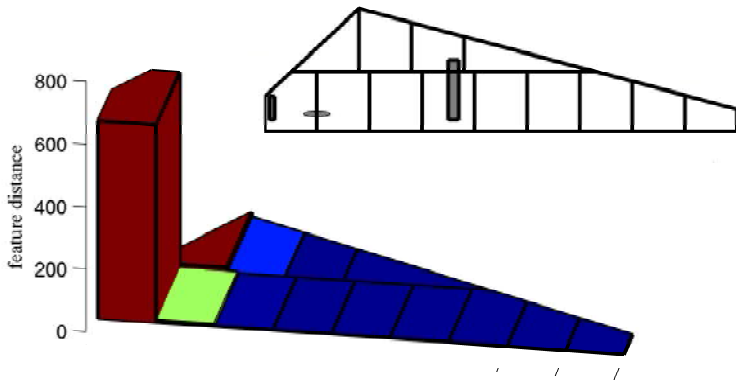


Damage localization on wind turbine shaped cantilever plate.

Damage Localization

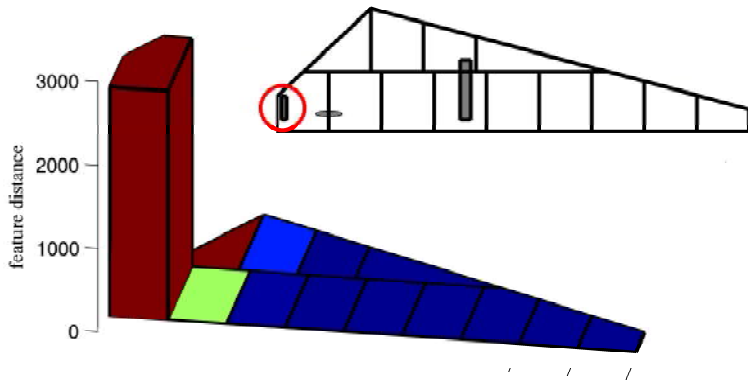


Damage localization on wind turbine shaped cantilever plate.

Damage Localization

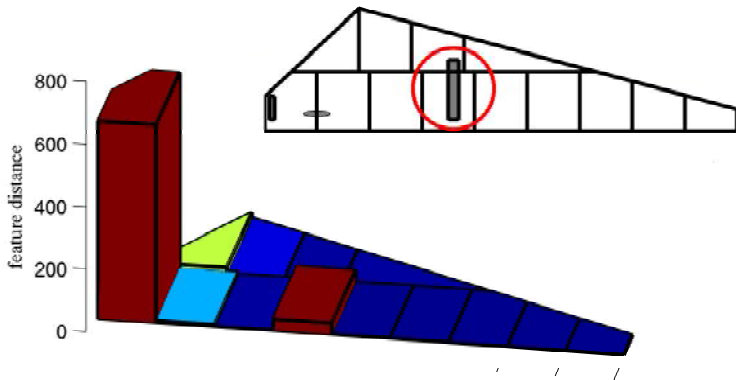

Damage localization on wind turbine shaped cantilever plate.


Damage Localization

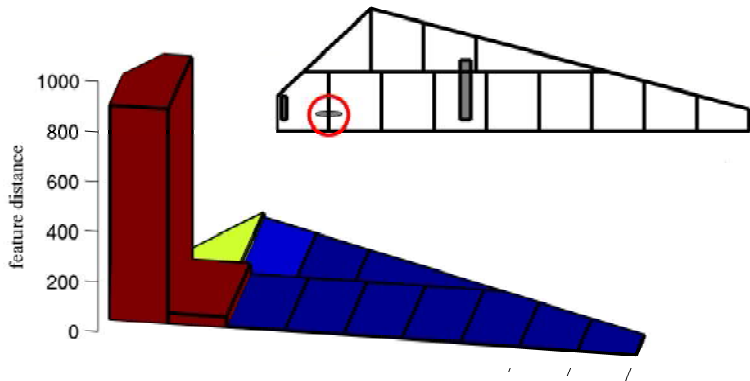

Damage localization on wind turbine shaped cantilever plate.

Conclusion

- Low cost measurement system for large area structures.
- Developed a damage detection technique using a HDSN.
- Demonstrated its ability to detect and localize damage.
- Developed basic understanding of the methods limitations.

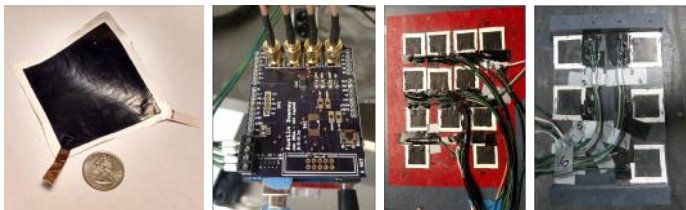

SEC technology: 1) SEC sensor; 2) 4 channel DAQ; and 3) HDSN; 4) HDSN.


Conclusion

Benefits

- No need for an external model or prolonged monitoring.
- Computationally efficient way to categorize HDSNs as healthy or possibly damaged.

Limitations

- Can be difficult to distinguish damage from complex loading.

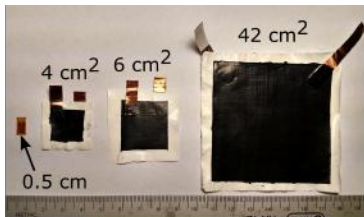

SECs of varying size.

Thank you



Sponsors



Upcoming wind energy conference

2017 SYMPOSIUM

**Sep 26-29, 2017
Ames, Iowa**

Addressing challenges to achieving 35% of North America's electricity from wind by 2035

